

effectiveness, allowing increasing amounts of Fats, Oil and Grease (FOG) to pass into

the downstream drainage system.

Solids

Uses all the best features of the field-proven Endura Grease interceptor, but now with solids management capability.

The Solids Basket Accessory can be fitted directly in to your Endura grease interceptor in place of the inlet baffle or be located within its own stand alone tank for ease of access and location.

The Endura Solids Basket

- Stand alone or integral to interceptor
- Easy to remove and maintain
- Removable dual screen filtration
- · 98% + Solids capture
- Integrated lifting handles
- Enhanced grease interceptor performance
- * Internal development testing



Phone: 908-236-0277
Fax: 908-236-0278
Web: www.drain-tech.com
Email: sales@drain-net.com












Sample Specification: Contractor shall install a Canplas Endura Solids Interceptor as a stand-alone/integrated (delete as applicable) solution. Said interceptor will be installed in accordance with manufacturer's instructions and all parts in direct contact with flow be wholly constructed of engineered thermoplastic capable of withstanding operational temperatures of 220°F (104°C). Baffles will be perforated with slots as opposed circular perforations for enhanced straining of elongated debris e.g. mop strings, spaghetti etc. The solids interceptor will be removable for cleaning and in operation have a minimum flow rate greater than 50GPM when loaded to 50% of its solids-holding capacity. Any baffles/straining method used will also be removable for maintenance and operation impose a dual means of filtration on solid material within the flow. When installed in a stand-alone configuration the tank will meet the same specification as above and have both a lid which is airtight and capable of supporting 440lbs (220kgs). The interceptor shall be supported by a minimum 10 year manufacturer's warranty.

INSTALLATION

The Endura Solids Basket Accessory (SBA) is sold as a separate item to allow the upgrading of any regular height Endura grease interceptor to provide solids management capability. When installing in this application simply remove the inlet baffle from your interceptor, replacing it with the solids basket accessory. This unit should be checked and cleaned at least weekly.




Solids

Note: Sufficient clearance above the interceptor must be available and maintained for removal and replacement of the solids basket.

Solids


DIMENSIONS

	Solids Interceptor	Solids Basket
Α	14.5" (368mm)	7.25" (184mm)
В	17.375" (441mm)	13.875" (352mm)
С	3.5" (89mm)	3" (76mm)
D	12.8" (325mm)	11.375" (289mm)
Е	16.3" (414mm)	14.375" (365mm)



Part No:	Part No: Description	
3911A02	Solids Interceptor (Complete with SBA)	2"
3911A-1	Solids Basket Accessory (SBA)	N/A

COMPONENTS

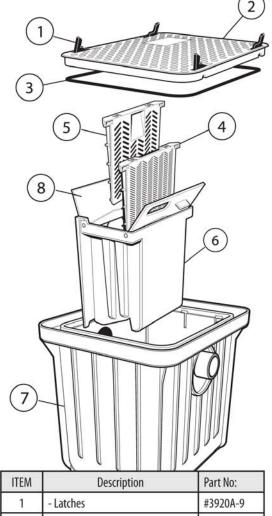

ITEM	Description	Part No:
1	- Latches	#3920A-9
2	- Reinforced Polypropylene Cover	#3910A-2
3	- Cover Gasket	#3910A-5
4	- Fine Screen	#3911-3
5	- Coarse Screen	#3911-2
6	- Solids Container	#3911-1
7	- One-piece tank	#3910A02-1
8	- Handle / Cover	#3911-4

Order At:

Toll Free Phone: 1-844-564-9216

Phone: 908-236-0277
Fax: 908-236-0278
Web: www.drain-tech.com
Email: sales@drain-net.com